



FIRE RANGER

FIRE – SERIES

FR-180/2 FR-220/2 FR-225/3 FR-240/3

A range of either 2 or 3 boom articulated rugged fire fighting aerials



City and Town Fire & Rescue



Harbour and Airport Security

CONTROL WITH PRECISION AND SAFETY

- Fully hydraulic controls
- Dual Controls at ground and cage
- Entry into the cage from the ground
- Safety Link Boom System
- Near Vertical Operation
- Single Lever Control for raising 2 booms
- High strength tubular steel cage
- Huge payloads
- Rugged and stable
- Clever Boom design allows low travel height
- Mounts on all makes of truck
- Full range of options including custom line and civil defence bodies
- H type jacks for narrow width
- Meets and exceeds UK and European Standards



*Petro-Chem and Factory
High Capacity Water operation
Up and over obstacles*



FAILSAFE, FAST & FIRM

FIRE RANGER

FIRE – SERIES

FR-180/2 FR-220/2 FR-225/3 FR-240/3




Pump and monitor options – with manual monitor as standard but foam, powder and remote control options available.

Options: Consult factory on all options

- ◆ Amplifier Intercom (2 way or 3 way)
- ◆ 110V @ cage; engine start/stop in cage
- ◆ Jack warning lights
- ◆ Line & custom bodies, crew cabs,
- ◆ Diesel Standby engine (Petrol standard)
- ◆ Full spares kit 1, 3 or 5 years operation
- ◆ Jack-less option with heavy duty anti roll bars
- ◆ Remote control and dry powder monitor
- ◆ CCTV wireless camera

Standard Features:

- ◆ Heavy duty construction
- ◆ Dual levelling steel cables for double safety
- ◆ 4 telescopic jacks with integral lock valves
- ◆ Full cylinder cushioning at stroke end
- ◆ Booms painted High Gloss White
- ◆ 360 degrees continuous rotation
- ◆ Mounted with decking, pump and PTO
- ◆ Full 2 year manufacturer's warranty

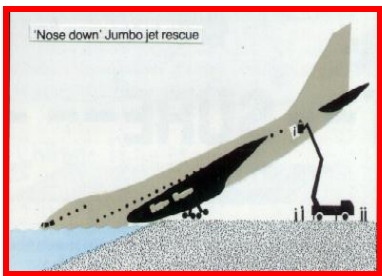

Large high strength tubular steel cage with full hydraulic controls, safety belt anchor points, work light(s), 24v electric take off point, cage lifting eye, rescue line and manual water & foam monitor.
Optional paint colours (standard white).



SPECIFICATIONS				
FIRE RANGER Model Code	FR-180/2	FR-220/2	FR-225/3	FR-240/3
Working height	18.0m	22.0m	22.5m	24.0m
No of Booms	2	2	3	3
Platform height	16.0m	20.0m	20.5m	22.0m
Maximum outreach	9.00m	11.0m	11.12m	11.12m
Max. safe working load (dry)	350kg	425kg	320kg	320kg
Cage Lifting Eye	350kg	425kg	320kg	320kg
GVW minimum	14.22 tonne	16.29 tonne	16.00 tonne	16.00 tonne
Stabiliser spread	2.50m	4.22m	4.22m	4.22m
TYPICAL OVERALL TRAVELLING DIMENSIONS				
Length	9,050mm	11,000mm	10,350mm	11,100mm
Width	2,500mm	2,500mm	2,500mm	2,500mm
Height (subject to truck details)	3,700mm	3,700mm	3,800mm	3,800mm

WH Bence Coachworks Ltd
Great Western Business Park, Armstrong Way
Yate, Bristol BS37 5NG - England

www.whbence.co.uk