

Bence

FIRE

RANGER

FIRE – SERIES

SF-380 SF-450 SF-550



Pinpoint Accuracy – Safe & Effective Fire Fighting

- ◆ Fully hydraulic proportional controls
- ◆ Self-centring joystick controls
- ◆ Up and over reach facility
- ◆ Dual control position
- ◆ Rotating cage and narrow jacking options

Designed to meet and exceed all International standards
CE Marked - EN 1777



▲ The FIRE-RANGER SF Series is mountable onto a wide range of chassis types to suit all applications

FIRE-RANGER SF Series

- ◆ 2, 3 & 4 stage reverse articulated steel booms with no knuckle projection zero tail swing
- ◆ Automatic cage levelling
- ◆ Four hydraulic stabilisers with boom interlocks with independent control
- ◆ 360° continuous rotation
- ◆ Power by PTO unit fitted to vehicle with interlock indicator
- ◆ Very large outreach
- ◆ Boom ladder package with automatic rung alignment
- ◆ Custom designed bodywork and fire fighting packages with water and foam pumps; stainless steel tanks and locker solutions

FAILSAFE, FAST & FIRM



FIRE RANGER

FIRE – SERIES

SF-380 SF-450 SF-550


Large high strength stainless steel cage with 4 doors and space to enter wheelchair, water monitor and water hose connection(s)



SF-550 on Mercedes Actros chassis with custom fire engineering bodywork and fixed pump installation



Superb cage access at ground level with fold-down front platform for stretcher & wheelchair rescue with room for 5 adults

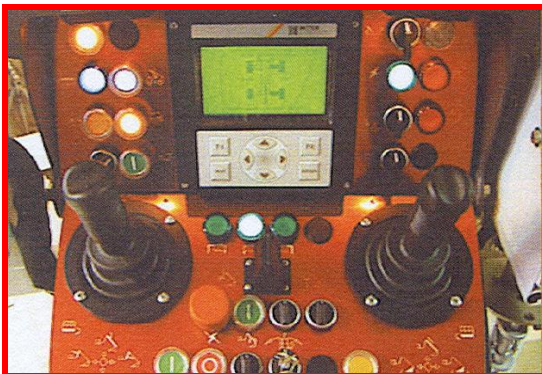

Full control of all cage movements and machine functions. User-friendly and easy to operate.



Rigorous testing to the highest international standards

SPECIFICATIONS			
FIRE RANGER Model Code	SF-380	SF-450	SF-550
Working height	38.0m	45.0m	55.0m
Maximum outreach	22.0m	26.0m	23.0m
Maximum safe working load	400kg	400kg	450kg
Length	9,700mm	11,200mm	12,000mm
Width	2,440mm	2,440mm	2,440mm
Height (subject to truck details)	3,650mm	3,800mm	3,9650mm



WH Bence Coachworks Ltd
Great Western Business Park, Armstrong Way
Yate, Bristol BS37 5NG - England

www.whbence.co.uk